


快速注册调试简易指南

该指南设置方法适合用国威GW11、GW11P、GW12P、GW21G、GW22G、GW31等国威IP电话机。

注册前需要话机与IPPBX（IP程控电话交换机）语音主机在同一个局域网内，设备可以跨网段、VLAN；并确认IPPBX的IP地址与端口，话机注册的分机号应为在IPPBX语音主机系统已经授权并存在的分机号码与分机号密码，话机才能注册。

一：话机快速注册

菜单→高级→密码（123）→账号→SIP1→设置→注册（开启）→注册地址（填写 IPPBX 服务器地址）→注册用户名（分机号）→注册密码（填写）→SIP 用户（与分机号一致）→注册端口（IPPBX 注册端口）→最后点击确认，注册成功，如下图：

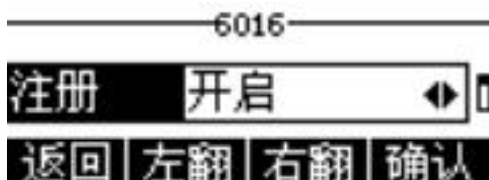

二：Web页面注册

1、查看话机IP地址方法：菜单→状态（可显示本机以太网IP地址），如下图：



2、浏览器输入屏幕显示IP地址，弹出登录话机界面，账号/密码(小写的)：admin

3、进入话机页面设置，点击线路，开始注册，步骤如下图所示：

A screenshot of the GW11 web interface. The left sidebar shows a menu with '线路' (Line) selected. The main content area is titled '2: 选择需要注册的话机SIP线路' (2: Select the SIP line to be registered). Below this, there is a dropdown menu for '线路' (Line) showing '6016@SIP'. To the right, there is a checkbox labeled '3: 启用打勾' (3: Check 'Enable'). Below that, there are two columns of registration settings. The first column is labeled '4: 填写用户分机号与分机密码 (IPPBX提供)' (4: Fill in user extension and password (provided by IPPBX)). It includes fields for '用户名' (Username) with '6016', '显示名' (Display Name), '域' (Domain), '服务器地址' (Server Address) with '192.168.0.249', '服务器端口' (Server Port) with '5060', '传输协议' (Transport Protocol) with 'UDP', and '注册有效期' (Registration Expiry) with '3600' seconds. The second column is labeled '5: 填写IPPBX服务器IP与端口' (5: Fill in IPPBX server IP and port). It includes fields for '服务器地址' (Server Address) with '热备IPPBX服务器' (Hot standby IPPBX server), '服务器端口' (Server Port) with '5060', '传输协议' (Transport Protocol) with 'UDP', and '注册有效期' (Registration Expiry) with '3600' seconds. Below these are fields for '代理服务器地址' (Proxy Server Address), '代理服务器端口' (Proxy Server Port) with '5060', '代理用户' (Proxy User), and '代理密码' (Proxy Password). At the bottom, there are sections for '基本设定' (Basic Settings), '编码设定' (Encoding Settings), '高级设定' (Advanced Settings), and '全局设置' (Global Settings). A '提交' (Submit) button is highlighted at the bottom right, labeled '6: 提交' (6: Submit).